

# HDC Specifications

Model No.	PSI	GPM	Displacement or HP/Engine	Gas Tank Cap.	Burner Fuel Tank Cap.	Fuel Consumption	Dimensions (LxWxH)	BTU	Ship Wt.	Net Wt.
HDC-3005-0K6G	3000	4.8	624cc Kohler	10.0 gallon	10.0 gallon	2.76 gph	50in.x34in.x45in.	386,400	844 lbs.	725 lbs.
HDC-3005-0V6G	3000	4.8	480cc Vanguard OHV	10.0 gallon	10.0 gallon	2.76 gph	50in.x34in.x45in.	386,400	844 lbs.	725 lbs.
HDC-3505-0B7G <sup>^</sup>	3500	4.7	15.5 HP Kubota	10.0 gallon	10.0 gallon	2.76 gph	56.5in.x34in.x45in.	386,400	940 lbs.	836 lbs.
HDC-3505-0H6G	3500	4.7	614cc Honda OHV	10.0 gallon	10.0 gallon	2.76 gph	50in.x34in.x45in.	386,400	844 lbs.	725 lbs.
HDC-3505-0K6G <sup>#</sup>	3500	4.7	624cc Kohler	10.0 gallon	10.0 gallon	2.76 gph	50in.x34in.x45in.	386,400	844 lbs.	725 lbs.
HDC-3505-0V6G	3500	4.7	627cc Vanguard OHV	10.0 gallon	10.0 gallon	2.76 gph	50in.x34in.x45in.	386,400	844 lbs.	725 lbs.
HDC-4004-0H6A <sup>*</sup>	4000	4.0	614cc Honda OHV	10.0 gallon	10.0 gallon	2.76 gph	50in.x34in.x45in.	343,000	844 lbs.	725 lbs.
HDC-4004-0K6A <sup>*</sup>	4000	4.0	624cc Kohler	10.0 gallon	10.0 gallon	2.76 gph	50in.x34in.x45in.	343,000	844 lbs.	725 lbs.
HDC-4004-0V6A <sup>*</sup>	4000	4.0	627cc Vanguard OHV	10.0 gallon	10.0 gallon	2.76 gph	50in.x34in.x45in.	343,000	844 lbs.	725 lbs.

<sup>^</sup> Diesel unit


POWERED BY **HONDA**

## Options

- 50-0170
- 850-0324
- AW-5740-0000
- HX-0130
- HX-0147
- HX-0156
- HX-0200
- HX-0212

- Stack adapter** - Allows 8-inch flue pipe to be installed to boiler exhaust port
- Gasket (for 50-0170)** - Seals between 50-0170 stack adapter and boiler housing
- Wheel kit** - Allows unit to become portable (See photo on front cover)
- Three-way ball valve** - Allows pressure washer to be operated from garden hose/float tank or trailer supply tank by adjusting ball valve lever
- Four (4) point lifting capability** - Allows unit to be lifted by a crane
- Hour meter** - Displays number of hours unit has been in operation
- Trapping unloader** - For longer hose runs & cleaning elevated areas
- Adjustable temperature control** - Operator is able to adjust outlet water temperature between 96°F-250°F

Model #	50-0170	850-0324	AW-5740-0000	HX-0130	HX-0147	HX-0156	HX-0200	HX-0212
HDC-3005	●	●	●	●	●	●	●	●
HDC-3505	●	●	●	●	●	●	●	●
HDC-4004	●	●	●	●	●	●	●	●

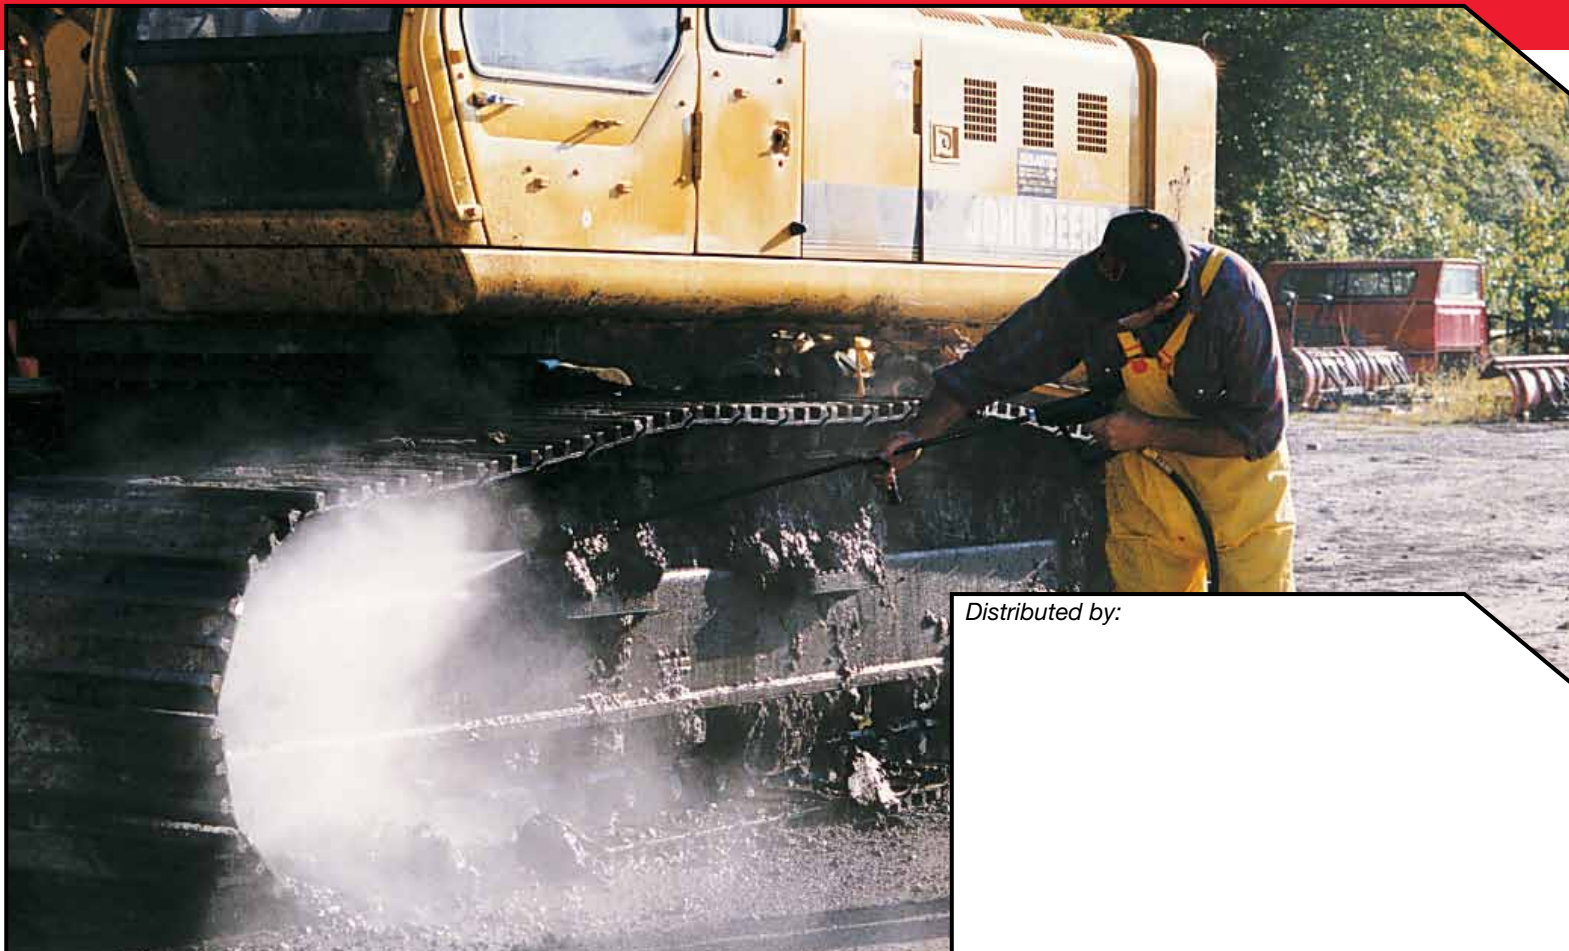

Distributed by:



# Hot Water Pressure Washers **HDC Series**



# HDC Series

The HDC Series is the most affordable and efficient skid on the market today. The best buy for a quick return on investment.

GASOLINE/DIESEL - BELT DRIVE

STATIONARY - SKID MOUNT



High quality fuel filter/water separator ensures clean fuel supply to the burner



Stainless-steel coil wrap prevents rusting



12-volt burner, no need for a generator (battery not included)



Large polyethylene float tank prevents rusting

## Additional Features:

- ✓ Forged brass manifold with removable valve caps
- ✓ Factory preset unloader (3000 to 4000-PSI models)
- ✓ Pressure relief valve protects against excessive system pressure
- ✓ Temperature rise 150°F/66°C above ambient
- ✓ No. 1 or No. 2 diesel or kerosene fired burner (Bio-fuel not approved at this time)
- ✓ Quick connect nozzles (10, 15, 25 & 40-degrees)



HDC-4004-0K6A shown with optional wheel kit (AW-5740-0000)




1/2-inch schedule 80-coil with stainless-steel wrap heat exchanger

Adjustable high pressure detergent injection

On/Off burner switch

Electric start engine

Heavy-duty powder coated steel square tube frame

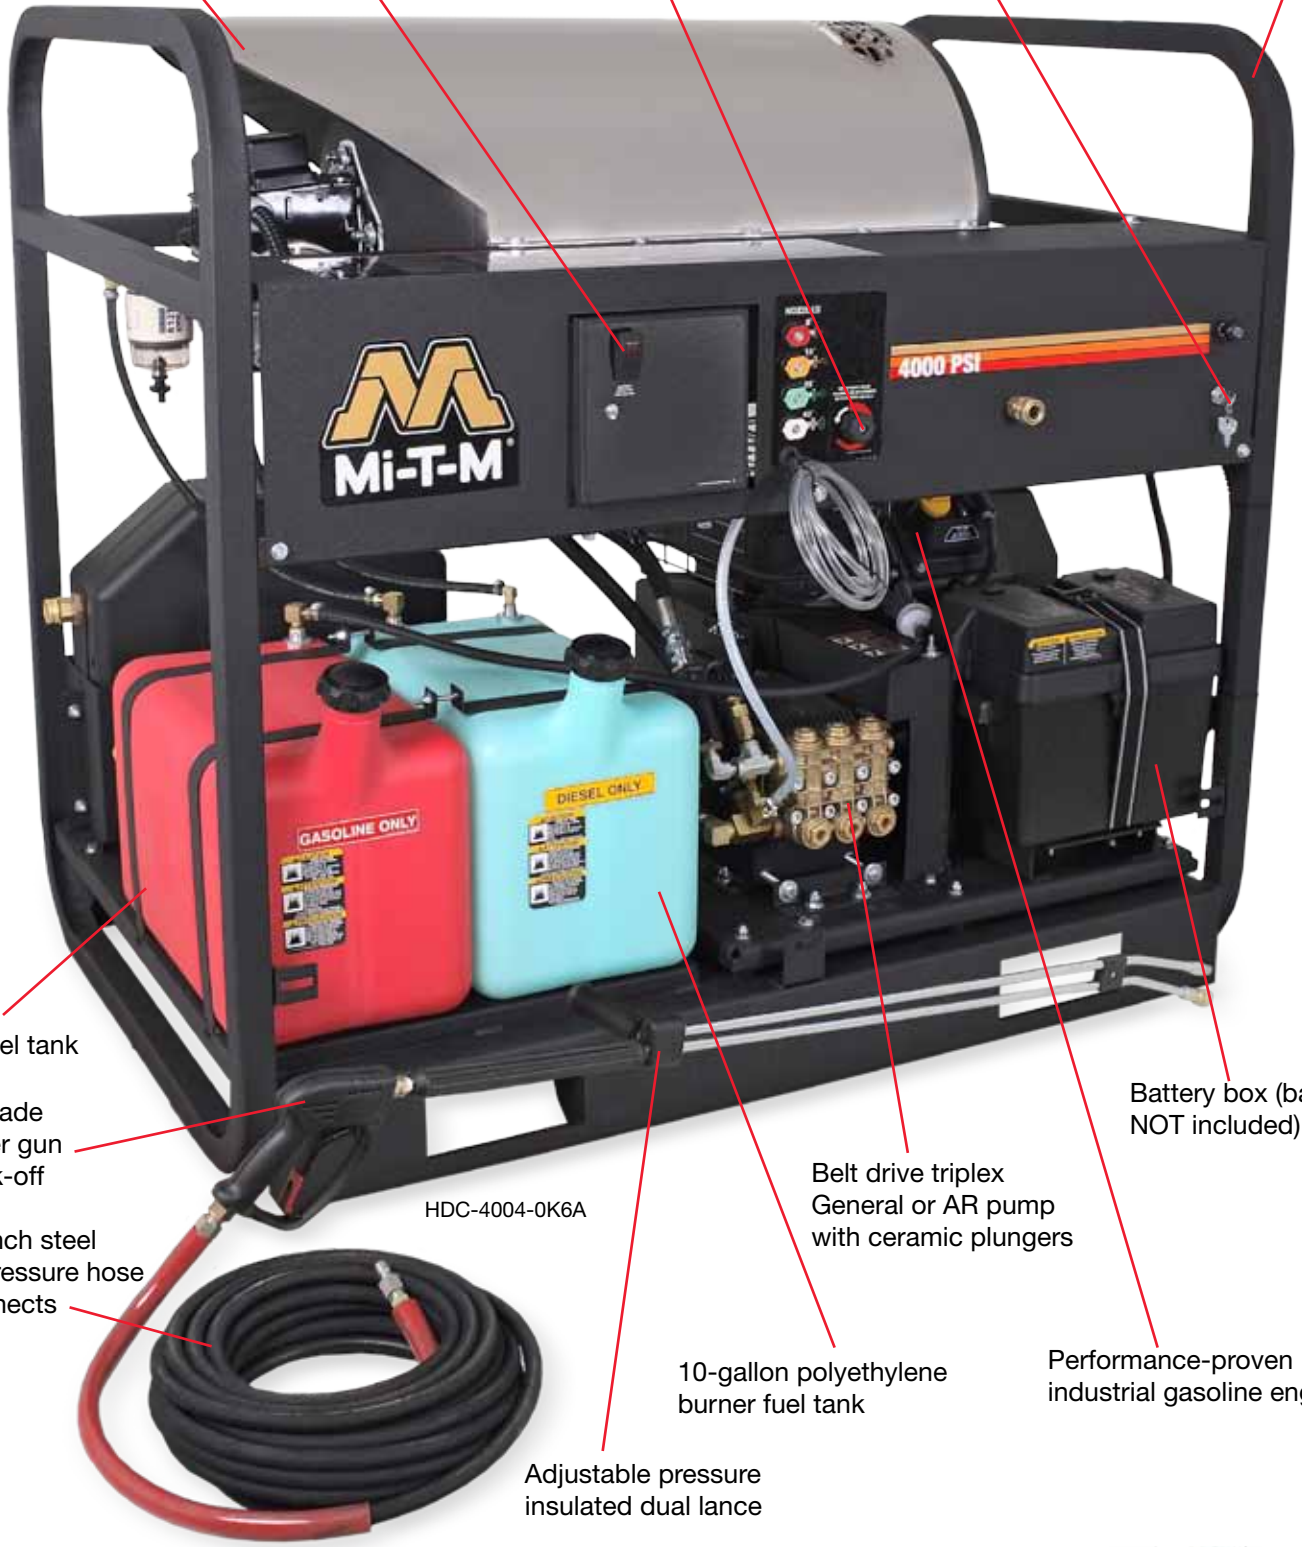

10-gallon gas polyethylene fuel tank

Professional-grade insulated trigger gun with safety lock-off

50-foot x 3/8-inch steel wire-braided pressure hose with quick connects

HDC-4004-0K6A

Belt drive triplex General or AR pump with ceramic plungers

Battery box (battery NOT included)

10-gallon polyethylene burner fuel tank

Performance-proven industrial gasoline engine

Adjustable pressure insulated dual lance



Mi-T-M offers a full line of products including cold water pressure washers, air compressors, generators, wet/dry vacuums, jobsite boxes and water treatment systems.